



SL50 stacklight


FEATURES

- 80 dB buzzer (solid and beeping feature)
- 360° viewing angle
- 5 distinct color separations
- Light weight, compact design
- Solid state LED lights
- The unit has several connection options
 - 8-pin Micro connector
 - 8-pin MD12 with 6' cabled
 - Short leaded, low cost Molex

MECHANICAL


- Standard 8-pin MICRO connector (male MD12)
- Solid connection – no detachable components*
- IP61 construction
- Length = 11" (279mm)
 - Ø (buzzer) = 1.74" (44.2mm)
 - Ø (shaft) = 1.25" (32mm)

**Assembly does not come apart, NO user serviceable or modifiable parts inside*

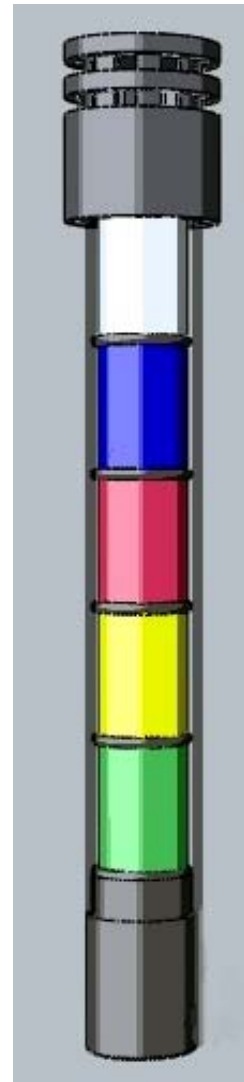

PIN DESCRIPTION			
Pin	Description	Nominal Voltage	Maximum Voltage
1	Common	-	-
2	Green Light	24V	30V
3	Amber Light	24V	30V
4	Red Light	24V	30V
5	Blue Light	24V	30V
6	White Light	24V	30V
7	Buzzer (solid)	24V	30V
8	Buzzer (beep)	24V	30V

apply operational voltage to respective pin to activate buzzer or lights

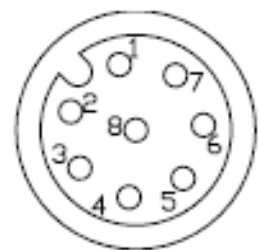

Bottom view (male connector)

ORDERING INFORMATION	
Part #	Description
AXM-SL50-L100	5 Color Mini Stack Light with Integrated Connector (8pin micro)
AXM- SL50-L101	5 Color Mini Stack Light with Integrated Connector (8pin .100 Molex header)
AXM- SL50-L102	5 Color Mini Stack Light with Integrated Cable (8pin micro)
AXM- SL50-L103	5 Color Mini Stack Light with 1/2" liquid tight connector

Call 1-888-WWW-ARCX or 905 513-9160
sales@arcx.com | www.arcx.com